



Open Archive Toulouse Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of Toulouse researchers and makes it freely available over the web where possible.

This is an author-deposited version published in: <http://oatao.univ-toulouse.fr/>
Eprints ID: 19719

To link to this article: DOI:10.1080/00207543.2017.1308575
URL:<https://doi.org/10.1080/00207543.2017.1308575>

To cite this version:

Khemiri, Rihab and Elbedoui-Maktouf, Khaoula and Grabot, Bernard and Zouari, Belhassen *A fuzzy multi-criteria decision making approach for managing performance and risk in integrated procurement-production planning*. (2017) *International Journal of Production Research*, vol. 55 (n°18). pp. 5305-5329. ISSN 0020-7543

Any correspondence concerning this service should be sent to the repository administrator: staff-oatao@listes-diff.inp-toulouse.fr

A fuzzy multi-criteria decision-making approach for managing performance and risk in integrated procurement–production planning

Rihab Khemiri^{a,b,c}, Khaoula Elbedoui-Maktouf^a, Bernard Grabot^{b*} and Belhassen Zouari^c

^aFaculty of Sciences of Tunis, University of Tunis El Manar, Tunis, Tunisia; ^bLGP, INPT-ENIT, Université de Toulouse, Tarbes Cedex, France; ^cMediatron Lab, Higher School of Communications of Tunis, University of Carthage, Carthage, Tunisia

Nowadays in Supply Chain (SC) networks, a high level of risk comes from SC partners. An effective risk management process becomes as a consequence mandatory, especially at the tactical planning level. The aim of this article is to present a risk-oriented integrated procurement–production approach for tactical planning in a multi-echelon SC network involving multiple suppliers, multiple parallel manufacturing plants, multiple subcontractors and several customers. An originality of the work is to combine an analytical model allowing to build feasible scenarios and a multi-criteria approach for assessing these scenarios. The literature has mainly addressed the problem through cost or profit-based optimisation and seldom considers more qualitative yet important criteria linked to risk, like trust in the supplier, flexibility or resilience. Unlike the traditional approaches, we present a method evaluating each possible supply scenario through performance-based and risk-based decision criteria, involving both qualitative and quantitative factors, in order to clearly separate the performance of a scenario and the risk taken if it is adopted. Since the decision-maker often cannot provide crisp values for some critical data, fuzzy sets theory is suggested in order to model vague information based on subjective expertise. Fuzzy Technique for Order of Preference by Similarity to Ideal Solution is used to determine both the performance and risk measures correlated to each possible tactical plan. The applicability and tractability of the proposed approach is shown on an illustrative example and a sensitivity analysis is performed to investigate the influence of criteria weights on the selection of the procurement–production plan.

Keywords: procurement; supply chain management; multi-criteria decision-making; risk management; fuzzy sets theory; fuzzy logic

1. Introduction

Supply Chain Planning (SCP) is one of the most important issues in Supply Chain Management (SCM) (Gupta and Maranas 2003). Three decision levels can be distinguished in SC planning: strategic, tactical and operational (Gupta and Maranas 1999). Strategic planning deals with long-term decisions, from two to ten years, concerning the design of the SC and its configuration (Chauhan, Nagi, and Proth 2004; Kemmoe, Pernot, and Tchernev 2014). Tactical decisions are made in the medium-term horizon, between three months and two years (Chhaochhria and Graves 2013; Khakdaman et al. 2015), in order to optimally use the resources and determine production and procurement quantities for the whole SC. Operational decisions are made with a short-term horizon, from one to two weeks, and mainly concern the exact scheduling of the detailed tasks according to various resource constraints (Baumann and Trautmann 2013; Wang, Liu, and Chu 2015; Ivanov et al. 2016). This article focuses on tactical planning.

Traditionally, procurement and production activities are handled separately. However, the ordered quantities of raw materials depend on the production quantities of finished product. Therefore, separating these two activities may result in sub optimisation and poor overall performance (Goyal and Deshmukh 1992).

Three paramount characteristics of the integrated procurement–production planning problems should be taken into account by the decision-maker: (i) The rapid market changes may result in conflicting objectives regarding performance maximisation and risk minimisation. (ii) The complex nature of the relationships amongst the different actors on the SC results in a high degree of uncertainty in the tactical planning decisions. (iii) Some input data and preferences are only accessible through human judgments or uncertain data that can hardly be estimated by crisp numerical values or by probability distributions.

However, few research works simultaneously consider all these issues. The majority of the existing literature addresses the integration of the planning activities as an optimisation process, oriented on cost minimisation (see for

*Corresponding author. Email: bernard.grabot@enit.fr

instance (Su and Lin 2015; Gholamian et al. 2015; Gholamian, Mahdavi, and Tavakkoli-Moghaddam 2016; Giri, Bardhan, and Maiti 2016)), and do not address qualitative (but important) evaluation criteria linked to the risk correlated to each procurement–production alternative, especially when changes occur.

Even if many approaches have been defined for coping with uncertainty, most of them are based on probability distributions, requiring knowledge on historical data. When such information is not available, fuzzy set theory (Gholamian, Mahdavi, and Tavakkoli-Moghaddam 2016), possibility theory (Torabi and Hassini 2008) and Dempster–Shafer Theory (Curcurù, Galante, and La Fata 2013) may help to deal with both epistemic uncertainty and subjective information.

In this context, the aim of this paper is to propose and test an integrated procurement–production planning system for a multi-echelon SC with multiple parallel manufacturing plants, multiple suppliers, multiples subcontractors and several customer zones, involving quantitative and qualitative criteria linked to performance and risk. Multi-Criteria Decision-Making (MCDM) techniques can provide a suitable base for the assessment phase. Within this framework, we suggest to model qualitative criteria, mostly evaluated using human judgments, by trapezoidal fuzzy numbers (Chou, Chang, and Shen 2008).

Bellman and Zadeh (1970) have been the first ones to integrate Fuzzy Set theory with MCDM as an effective approach to deal with the vagueness of the human decision-making process. Fuzzy Technique for Order of Preference by Similarity to Ideal Solution (fuzzy-TOPSIS) (Chen 2000) will be used in this article to rank the alternatives planning under evaluation.

This article has three main contributions. Firstly, it suggests an analytical model allowing to generate the set of procurement–production scenarios allowing to satisfy the demand in the context of multiple parallel manufacturing plants, multiple suppliers, multiples subcontractors and multiple customer zones. Secondly, it introduces risk-based criteria, often neglected in the existing contributions, in the procurement–production problem. Thirdly, it proposes a multi-criteria decision support approach providing independent measures of the performance and risk correlated to each procurement–production scenario.

The article is structured as follows. The relevant literature is explored in next section. Section 3 suggests various decision criteria for evaluating allocation scenarios. Section 4 introduces the theoretical background of this work while Section 5 presents the structure of the SC and the considered problem. In Section 6, the proposed multi-criteria decision-making approach is detailed, an illustrative example being presented in Section 7. Finally, a sensitivity analysis is performed to investigate the importance of the weights of the criteria on the decision-making process.

2. Literature review

This short survey is mainly oriented on the two problems to solve: the integrated procurement–production planning problem, and the decision criteria that can be used for the supplier selection and order allocation problems.

2.1 Tactical supply chain planning

A wide variety of tactical planning models has been developed in the scientific literature on SCM, and may be classified according to the characteristics of the physical system (i.e. single plant/multiple plants), to the domain of decision (i.e. production, distribution and procurement), and to the data used (crisp/deterministic vs. imprecise/stochastic data). When deterministic data cannot be found, a large number of studies use stochastic programming (Gupta and Maranas 2003; Kazemi Zanjani, Nourelfath, and Ait-Kadi 2010) or robust optimisation (Kanyalkar and Adil 2010; Mirzapour Al-e-hashem, Malekly, and Aryanezhad 2011; Niknamfar, Niaki, and Pasandideh 2015). In this case, probability distributions are usually deduced from historical data. However, in practice, providing a realistic probability distribution is not easy. Nevertheless, the actors of the company often have a good practical expertise that can be reused. Fuzzy Sets Theory can be an efficient tool for modelling such subjective data, and has been used in that purpose in several recent researches related to tactical SCP, e.g. for production planning (Wang and Liang 2005; Chen and Huang 2010), or for dealing with the interrelations between distribution and production (Liang 2008; Selim, Araz, and Ozkarahan 2008; Torabi and Moghaddam 2011). Among the rare studies modelling uncertainties by fuzzy sets for integrated procurement–production planning, (Chen and Chang 2006) suggests a multi-product, multi-period and multi-echelon SC model for reducing costs when the demand, the unitary cost of raw materials and the unitary transportation cost of products are modelled by fuzzy numbers. Torabi and Hassini (2008) developed a multi-objective possibilistic mixed integer linear programming model to formulate an integrated procurement, production and distribution planning problem in a fuzzy environment for a three echelon SC consisting of multiple suppliers, one manufacturer and multiple distribution centres. The proposed model uses two objectives functions: minimisation of the total cost of logistics and maximisation of the total value of purchasing. The latter considers the impact of qualitative criteria related to purchasing decisions,

such as technical capacities of the suppliers, business structure and after sale services. However, in spite of the subjective nature of these criteria, they are assessed quantitatively. This work was extended in (Torabi and Hassini 2009) by proposing an interactive fuzzy goal programming approach for a multi echelon SC in presence of imprecise data, such as market demand and available capacities. As in their previous work (Torabi and Hassini 2008), the authors evaluate subjective criteria using quantitative measurements.

Peidro et al. (2009) introduced a fuzzy mixed-integer linear programming model for integrating procurement, production and distribution planning where supply, demand and process are modelled by triangular fuzzy numbers. The target is the best use of the available resources while meeting customer demand at minimum cost. The authors developed a strategy for transforming the fuzzy formulation into an equivalent axillary crisp mixed integer linear programming model.

Recently, Gholamian et al. (2015) developed a fuzzy multi-objective mixed integer nonlinear programme for a multi-echelon SC. Four objective functions were suggested: (i) minimising the total cost, (ii) improving the customer satisfaction, (iii) minimising the rate of changes of the workforce and (iv) maximising the total value of purchasing. The first three conflicting criteria were reused in (Gholamian, Mahdavi, and Tavakkoli-Moghaddam 2016) to formulate a mixed integer nonlinear programme for an integrated tactical and operational planning, solved by fuzzy optimisation.

We can observe that a limited number of studies deal with integrated procurement–production planning. Moreover, these studies mainly suggest the use of mathematical optimisation approaches, the objectives at the mid-term horizon being usually limited to meeting the customer demands and minimising the total cost / maximising the total profit. These approaches do not consider subjective criteria, or convert them into quantitative ones. Indeed, even if the presence of imprecise / expert data is recognised as an important characteristic of such planning problems, few studies suggest using the available expert knowledge.

Another important limitation is that these methods do not include risk management in their decision process. Indeed, they limit the awareness on risk to the existence of some uncertain parameters, such as market demand, supply, production process and their associated costs and do not consider explicitly the characteristics and behaviour of the partners of the SC (suppliers, plants, etc.) facing risk.

In the following sub-section, a short review of the most frequently used decision criteria in supplier selection and order allocation processes is given.

2.2. Supplier selection and order allocation problem

Supplier selection is an important strategic decision in SCM. Many criteria, either quantitative or qualitative, have been proposed since 1966, such as quality, productive capability, price, delivery, industry position, financial stability, performance history, reputation, location, reliability, responsiveness, safety, customer responsiveness, relationship closeness, etc. (Weber, Current, and Benton 1991; Dickson 1966; Huang and Keskar 2007). Nevertheless, most studies suggest that product quality, price and delivery time are the most important ones (Shipley 1985; Ellram 1990; Pi and Low 2005). We think that this is not anymore true in an ever-changing context in which the execution of an optimal planning may be set into question by unexpected events.

The allocation of the orders to the selected suppliers should also be optimised. (Guneri, Yucel, and Ayyildiz 2009) presents an integrated fuzzy linear programming approach to solve the multiple sourcing supplier selection problem under uncertainty and vagueness. The proposed approach uses trapezoidal fuzzy numbers to evaluate importance weights and ratings of supplier selection criteria including reputation and position, relationship closeness, performance history, delivery capability and conflict resolution. As a second step, a linear programming model is presented to select the best suppliers and the optimal order quantities, considering the objective of total value purchase maximisation and constraints such as quality, budget and capacity.

Mafakheri, Breton, and Ghoniem (2011) suggest a two stage multiple criteria dynamic programming approach to solve the supplier selection and order allocation problem. In the first stage, Analytic Hierarchy Process (AHP) (Saaty 1980) is used to rank potential suppliers using four criteria (quality, price performance, delivery performance and environmental performance) decomposed into 21 qualitative and quantitative sub-criteria. Then, an order allocation model is proposed on the basis of two objectives: minimising the total SC costs and maximising the utility function for the company.

In (Arabzad et al. 2015), suppliers are evaluated using a Strengths, Weaknesses, Opportunities and Threats analysis according to quantitative and qualitative criteria. Fuzzy TOPSIS is then used to determine the weights of the criteria. In the second phase, the results provided by Fuzzy TOPSIS are used as input for a mixed integer linear programming calculating the allocated order to each supplier. The model is solved using LINGO.

Zouggari and Benyoucef (2012) also proposed a two-phase decision-making approach for supplier selection, then order allocation. In the first phase, Fuzzy-AHP is used to select suppliers based on four classes of criteria (performance strategy, quality of service, innovation and risk), qualitatively evaluated. In the second phase, Fuzzy TOPSIS is used to assess the order allocation among the selected suppliers on the base of three criteria (cost, quality and delivery). This article is one of the few taking explicitly 'risk' into account, but only strategic risks are considered, linked to the geographical location of the supplier and the political and economic stability of its country. However, risks can also occur at the tactical level, linked to the poor flexibility of a supplier for instance, that may become a problem if changes are required. Consequently, it is in our opinion important to consider risk factors not only when selecting the suppliers but also when allocating them the orders.

It can be seen that the majority of existing studies on the supplier selection problem with order allocation are exclusively based on performance criteria. Factors of risk like poor flexibility of the supplier, low commitment, or fragility are not considered at middle term. When present, the criteria related to risk are generally aggregated with others in order to compute an overall score for each supplier. In our opinion, they should be clearly distinguished from criteria linked to performance, since they provide information of different nature. They should therefore be displayed without a priori aggregation, so that the decision-maker can distinguish these two dimensions of a plan.

To overcome the various limitations described above, we suggest developing a tactical planning method based on both performance and risk decision criteria, clearly distinguished from each other and efficiently captured through expert knowledge. To achieve this goal, a multi-criteria decision-making approach is used and several novel decision criteria are proposed.

3. Proposed decision criteria

We suggest in what follows a list of sub-criteria allowing assessing the performance and risk of a procurement–production plan. Nevertheless, the list should be adapted in order to fit with the specificity of a given real case.

3.1 Class I: performance-based decision criteria

This first class of criteria aims at assessing the performance of a plan. We have selected the following criteria:

- *Cost price*: The total cost of the tactical plan includes production, subcontracting and purchasing costs. These costs may be imprecisely known at middle term; they will therefore be described by fuzzy numbers.
- *Number of actors*: suppliers, manufacturing plants and subcontractors involved in a plan. This criterion may be relevant or not according to the decision maker's policy. Some companies estimate that reducing the number of suppliers allows improving quality and reducing cost (Monczka, Trent, and Callahan 1993; Goffin, Szwejcowski, and New 1997). The opposite strategy (multi sourcing) may also be adopted in order to decrease the dependence on a supplier.
- *Quality*: The quality related to each tactical plan is the estimated capacity of the involved partners to deliver parts of the required specifications in the required conditions of packaging. We have chosen here a global and qualitative assessment of the quality criterion.
- *Reliability*: The reliability is considered here as the ability of a supplier to deliver the orders on time. The reliability of a supplier is supposed to be evaluated by the decision-maker in qualitative terms.

3.2 Class II: risk-based decision criteria

These criteria should allow distinguishing the suppliers able to react to changes, from others who have good performance but may have difficulties coping with unexpected events.

- *Flexibility*: The flexibility of a supplier is considered here as its ability to take into account changes imposed by the customer in the characteristics of the product while the order is in process.
This criterion may be for instance important if the configuration of customised products can be modified at short term. It will of course not be used if the orders only concern standard and stable products.
- *Responsiveness*: The responsiveness is seen here as the ability of the supplier to answer to a change in the due date of the orders. Again, such criterion will not be of interest in case of stable demand.
- *Robustness*: The robustness of a supplier can be defined as its insensitivity to disturbances. This criterion is of increasing concern, because tactical plans are often affected by uncontrollable factors (Genin, Lamouri, and Thomas 2008).

- *Resilience*: Resilience is sometimes defined as the ability of the actor to get back to its original state after disruption (Mensah and Merkurjev 2014), but this definition is in our opinion too close to the one of robustness. According to Bhamra, Dani, and Burnard (2011), resilience is the ability of an entity to return to a stable state after disruption. In psychology, resilience is the ability of an individual to reach a satisfactory state (even if different from the one initially expected) after a crisis (Cyrulnik and Macey 2009). We select this definition here.

In recent years, there has been a considerable academic interest in SC resilience (Tukamuhabwa et al. 2015). However, only few studies integrate the resilience criterion into the supplier selection process (Haldar et al. 2012, 2014; Sahu, Datta, and Mahapatra 2016). To our best knowledge, none considers it for order allocation.

- *Stability*: The stability of a supplier is linked to the planning more than to the supplier itself: it expresses the stability of the load of the supplier between two consecutive periods. Practical studies have shown that a supplier (especially a small one) can be destabilised by important load variations (Ming, Grabot, and Houé 2014), leading to an increased risk to be unable to fulfil the orders. We shall assess this criterion by calculating the difference between the previous and the actual load, therefore estimating an **instability** measure that should be minimised.

Quality, reliability, flexibility, responsiveness, robustness and resilience are benefit criteria (to be maximised), whereas cost price, number of actors and instability are cost criteria (to be minimised).

Except the instability criterion, all these criteria will be qualitatively assessed according to an expert judgement.

In next sections are provided the theoretical bases allowing using these criteria for assessing a supplier, then a procurement–production plan.

4. Theoretical background

4.1 Multi-criteria decision-making methods

Several methods have been proposed to deal with multi-criteria assessment problems, frequently classified according to the discrete or continuous nature of the alternatives. A discrete problem (Multi Attribute Decision Making (MADM)) usually consists of a limited number of decision alternatives, whereas a continuous problem (Multi Objective Decision Making) deals with a large or infinite amount of alternatives. The main proposal of this study is to evaluate each pre-specified procurement–production plan through performance-based and risk-based decision criteria. The decision-making problem has thus a discrete nature and a MADM method will be adequate in this case. MADM methods may be categorised according to their compensatory or non-compensatory nature. The compensatory methods are based on multi-attribute value functions and Multi-Attribute Utility Theory (MAUT) and use an aggregation of the criteria. In contrast, the non-compensatory methods are mainly based on an outranking relation, which consists in the comparison between the alternatives according to each individual criterion. PROMETHEE (Brans and Vincke 1985) and ELECTRE (Roy and Bertier 1971; Roy 1978) are the most prevalent outranking methods. However, it has been acknowledged that such methods are able to provide a partial ranking among alternatives, but not a global one. Accordingly, MAUT methods are considered in this paper. Among these methods, we can cite for example AHP (Saaty 1980), Technique for Order of Preference by Similarity to Ideal Solution (TOPSIS) (Hwang and Yoon 1981), Visekriterijumska optimizacija i KOmpromisno Resenje (VIKOR) (Opricovic 1998), COmplex PROportional ASsessment (COPRAS) (Zavadskas, Kaklauskas, and Sarka 1994), Multi-Attributive Border Approximation Area Comparison (MABAC) (Pamučar and Čirović 2015; Gigović et al. 2017) and Multi-Attributive Ideal-Real Comparative Analysis (MAIRCA) (Pamučar, Vasin, and Lukovac 2014; Gigović et al. 2016).

Each method has its advantages and drawbacks, including its complexity of use. In this study, TOPSIS is chosen for the four advantages cited in Kim, Park, and Yoon (1997) and Shih, Shyur, and Lee (2007): (i) a sound logic that characterises the rationale of human choice; (ii) a scalar number calculated on the basis of both the worst and the best alternatives simultaneously; (iii) a simple computation method that can be readily programmed in a spread sheet; and (iv) the performance measures of each alternative on the various attributes can be presented on a polyhedron, at least for two dimensions. In addition, TOPSIS (but it is also the case for the aforementioned methods) has been extended for dealing with fuzzy criteria or weights (Triantaphyllou and Lin 1996; Chen 2000).

Thus, Fuzzy TOPSIS, described with more details in Section 4.3, is used for evaluating the performance and the risk correlated to each alternative planning, through several quantitative and qualitative criteria.

4.2 Fuzzy set theory

Fuzzy set theory was introduced by Zadeh (1965) for representing the inherent imprecision, uncertainty and vagueness of subjective information. Trapezoidal fuzzy numbers are used here to represent the imprecise data: this restriction

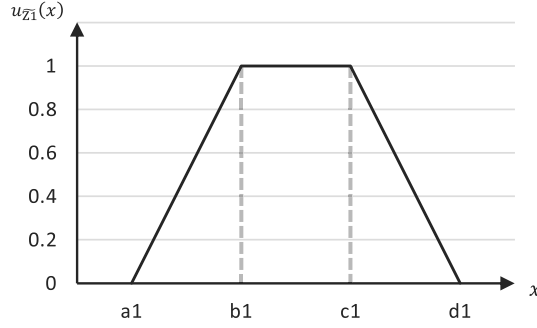


Figure 1. Trapezoidal fuzzy set.

allows simple calculations, and it has often been shown that this modelling framework is sufficient for modelling expert knowledge (Chou, Chang, and Shen 2008).

Definition 1: A trapezoidal fuzzy number \tilde{z}_1 can be represented as a quadruplet of real numbers (a_1, b_1, c_1, d_1) as shown in Figure 1.

Definition 2: Given two fuzzy trapezoidal fuzzy numbers $\tilde{z}_1 = (a_1, b_1, c_1, d_1)$ and $\tilde{z}_2 = (a_2, b_2, c_2, d_2)$ and any positive real number r , the main operations on fuzzy numbers can be defined as follows (Chen, Lin, and Huang 2006):

$$\tilde{z}_1 \oplus \tilde{z}_2 = (a_1 + a_2, b_1 + b_2, c_1 + c_2, d_1 + d_2) \quad (1)$$

$$\tilde{z}_1 \ominus \tilde{z}_2 = (a_1 - d_2, b_1 - c_2, c_1 - b_2, d_1 - a_2) \quad (2)$$

$$\tilde{z}_1 \otimes \tilde{z}_2 = (a_1 * a_2, b_1 * b_2, c_1 * c_2, d_1 * d_2) \quad (3)$$

$$\tilde{z}_1 \otimes r = (a_1 * r, b_1 * r, c_1 * r, d_1 * r) \quad (4)$$

Definition 3: Let $\tilde{z}_1 = (a_1, b_1, c_1, d_1)$ and $\tilde{z}_2 = (a_2, b_2, c_2, d_2)$ be two trapezoidal fuzzy numbers; the distance between them can be calculated using the vertex method (Chen 2000; Chen, Lin, and Huang 2006):

$$D(\tilde{z}_1, \tilde{z}_2) = \sqrt{\frac{1}{4}[(a_1 - a_2)^2 + (b_1 - b_2)^2 + (c_1 - c_2)^2 + (d_1 - d_2)^2]} \quad (5)$$

Definition 4: A matrix \tilde{D} is called a fuzzy matrix if it includes at least a fuzzy entry (Buckley 1985).

Definition 5: A linguistic variable is a variable which value is presented in linguistic terms (Zimmermann 2011). Linguistic variables are commonly used to express subjective or qualitative appreciation of a decision-maker, using terms such as ‘very low’, ‘low’, ‘medium’, ‘high’, etc. Linguistic values can be modelled by fuzzy numbers.

4.3 From TOPSIS to Fuzzy TOPSIS

To compare solutions, TOPSIS computes the distance from each alternative to the Positive Ideal Solution (PIS) and Negative Ideal Solution (NIS). The PIS (resp. NIS) is the solution that minimises (resp. maximises) the ‘cost’ criteria and maximises (resp. minimises) the ‘benefit’ criteria (‘cost’ and ‘benefit’ are considered here in a broad sense). Fuzzy TOPSIS uses linguistic variables to model the ratings and the weights of the criteria (Triantaphyllou and Lin 1996; Chen 2000). This approach includes six steps:

Step 1: Construction of the fuzzy decisions matrix and of the weight vector

Let us assume that there are m possible alternatives $A_i (i = 1, \dots, m)$ to solve a problem, evaluated on n criteria $C_j (j = 1, \dots, n)$. The rating of the alternatives with respect to the different criteria may be represented by a decision matrix \tilde{D} :

$$\tilde{D} = \begin{matrix} & C_1 & C_2 & \dots & C_n \\ A_1 & \tilde{x}_{11} & \tilde{x}_{12} & \dots & \tilde{x}_{1n} \\ A_2 & \tilde{x}_{21} & \tilde{x}_{22} & & \tilde{x}_{2n} \\ & \dots & \dots & \dots & \dots \\ A_m & \tilde{x}_{m1} & \tilde{x}_{m2} & \dots & \tilde{x}_{mn} \end{matrix} \quad (6)$$

where \tilde{x}_{ij} is a linguistic value that represents the performance rating of alternative A_i with respect to criterion C_j .

The criteria weights can be expressed in a vector as follows:

$$\tilde{w} = [\tilde{w}_1, \tilde{w}_2, \dots, \tilde{w}_n] \quad (7)$$

where \tilde{w}_j may also be a linguistic value that represents the importance weight of criterion j .

In this article, \tilde{x}_{ij} and \tilde{w}_j ($i = 1, \dots, m$ and $j = 1, \dots, n$) are assumed to be trapezoidal fuzzy numbers given by: $\tilde{x}_{ij} = (a_{ij}, b_{ij}, c_{ij}, d_{ij})$ and $\tilde{w}_j = (w1_j, w2_j, w3_j, w4_j)$.

Step 2: Construction of the normalised fuzzy decisions matrix

The decision matrix is normalised to avoid anomalies resulting from different criteria scales. The set of criteria can be categorised into ‘cost’ criteria (Co) (to be minimised) and ‘benefit’ criteria (B) (to be maximised). The normalised fuzzy decision matrix can then be calculated as:

$$\tilde{R} = [\tilde{r}_{ij}]_{m \times n}, \quad i = 1, \dots, m \text{ and } j = 1, \dots, n \quad (8)$$

$$\tilde{r}_{ij} = \left(\frac{a_{ij}}{d_j^+}, \frac{b_{ij}}{d_j^+}, \frac{c_{ij}}{d_j^+}, \frac{d_{ij}}{d_j^+} \right), \quad j \in B \quad (9)$$

$$\tilde{r}_{ij} = \left(\frac{a_j^-}{d_{ij}^-}, \frac{a_j^-}{c_{ij}^-}, \frac{a_j^-}{b_{ij}^-}, \frac{a_j^-}{a_{ij}^-} \right), \quad j \in Co \quad (10)$$

where $d_j^+ = \max_i d_{ij}$ if $j \in B$ and $a_j^- = \min_i a_{ij}$, $j \in Co$.

Step 3: Construction of the weighted normalised fuzzy decisions matrix

The weighted normalised fuzzy decisions matrix is defined by multiplying the normalised fuzzy decision matrix by the importance weights of the criteria as follows:

$$\tilde{V} = [\tilde{v}_{ij}]_{m \times n}, \quad i = 1, 2, \dots, m; \quad j = 1, 2, \dots, n \quad (11)$$

$$\tilde{v}_{ij} = \tilde{r}_{ij} \otimes \tilde{w}_j \quad (12)$$

Step 4: Computation of the fuzzy positive ideal solution and the fuzzy negative ideal solution

The fuzzy positive ideal solution (FPIS) denoted by A^+ and the fuzzy negative ideal solution (FNIS) A^- can be defined, respectively, as:

$$A^+ = (\tilde{v}_1^+, \tilde{v}_2^+, \dots, \tilde{v}_n^+) \quad (13)$$

$$A^- = (\tilde{v}_1^-, \tilde{v}_2^-, \dots, \tilde{v}_n^-) \quad (14)$$

where $\tilde{v}_j^+ = \max_i \tilde{v}_{ij4}$; $\tilde{v}_j^- = \min_i \tilde{v}_{ij1}$; $i = 1, \dots, m$; $j = 1, \dots, n$.

It should be noted that if all the criteria are assessed using the same set of fuzzy linguistic variables, there is no need to normalise the fuzzy decision matrix, and the FPIS and FNIS can be respectively defined as:

$$A^+ = (\tilde{v}_1^+, \tilde{v}_2^+, \dots, \tilde{v}_n^+) = (\max_i V_{ij4} | j \in B), (\min_i V_{ij1} | j \in Co) \quad (15)$$

$$A^- = (\tilde{v}_1^-, \tilde{v}_2^-, \dots, \tilde{v}_n^-) = (\min_i V_{ij1} | j \in B), (\max_i V_{ij4} | j \in Co) \quad (16)$$

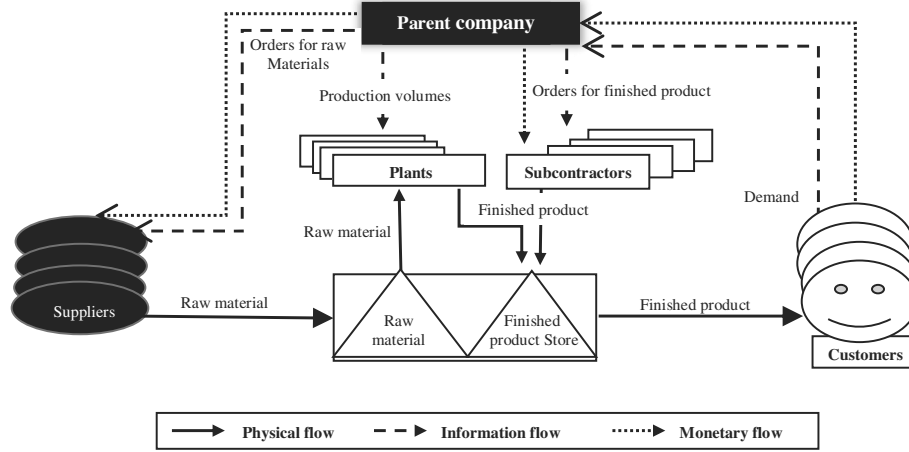


Figure 2. Structure of the supply chain.

Step 5: Determination of the distance between each alternative, FPIS and FNIS

The distance from each alternative to the FPIS and the FNIS are:

$$d_i^+ = \sum_{j=1}^n d(\tilde{v}_{ij}, \tilde{v}_j^+), \quad i = 1, \dots, m \quad (17)$$

$$d_i^- = \sum_{j=1}^n d(\tilde{v}_{ij}, \tilde{v}_j^-), \quad i = 1, \dots, m \quad (18)$$

where $d(\cdot, \cdot)$ denotes the distance between two fuzzy numbers, calculated using Equation (5).

Step 6: Computation of the closeness coefficient and ranking the alternatives

In order to aggregate the two distances, a Closeness Coefficient (CC) is calculated for each alternative according to d^+ and d^- as follows:

$$CC_i = \frac{d_i^-}{d_i^- + d_i^+}, \quad i = 1, \dots, m \quad (19)$$

CC is defined so that an alternative is close to FPIS and far from FNIS if its closeness coefficient is close to 1.

We shall see in the next section how these methods and tools may be used to address the considered problem.

5. Problem description

The structure of the SC considered in this work is presented in Figure 2. This generic yet simplified SC is composed of multiple suppliers, multiple parallel manufacturing plants and multiple subcontractors. Each manufacturing plant can produce several finished products using components provided by the suppliers. Production cost of the same product can be different according to the manufacturing plant. To increase its production capacity, each manufacturing plant can use overtime. Regular hours and overtime hours are limited for each period. For simplicity, we have not considered the transportation costs in this work (they can be considered as included in the costs of products, or can be added in a more precise way in the models if needed). In addition, it is assumed that the production durations are negligible. Again, taking into account different production durations complicates the problem without setting specific theoretical issues. Costs and capacities of each supplier and subcontractor can be different.

We assume that a predefined list of approved suppliers is given. For simplification purpose, it is assumed that a manufacturing plant is considered as a single stage production system, for instance by considering the bottleneck resource.

6. Proposed approach

6.1 Notation

- Set of indices:

T	Number of time periods ($t = 1, \dots, T$)
P	Number of finished products ($p = 1, \dots, P$)
R	Number of raw materials ($r = 1, \dots, R$)
M	Number of manufacturing plants ($m = 1, \dots, M$)
S	Number of suppliers ($s = 1, \dots, S$)
B	Number of subcontractors ($b = 1, \dots, B$)
S^r	Set of suppliers providing raw material r (i.e. $S^r \subseteq \{1, \dots, S\}$)
M^p	Set of manufacturing plants producing finished product p (i.e. $M^p \subseteq \{1, \dots, M\}$)
B^p	Set of subcontractors supplying finished product p (i.e. $B^p \subseteq \{1, \dots, B\}$)

- Crisp parameters:

R^p	Set of raw materials required to produce a final product p
$a_{p,r}$	Quantity of raw material r required to produce a unit of final product p
$cap_r_{m,p,t}$	Maximum number of product p that can be produced in regular time at manufacturing plant m during period t
$cap_ov_{m,p,t}$	Maximum number of product p that can be produced in overtime at manufacturing plant m during period t
$cap_b_{b,p,t}$	Maximum number of product p that can be provided by subcontractor b during period t
$cap_s_{s,r,t}$	Maximum number of raw material r that can be provided by supplier s during period t
$D_{p,t}$	Global demand of finished product p in period t resulting from all the customers

- Fuzzy parameters:

$\widetilde{c_F}_{m,p,t}$	Production cost for a unit of product p in regular time at manufacturing plant m in period t
$\widetilde{c_OV}_{m,p,t}$	Production cost for a unit of product p in overtime at manufacturing plant m in period t
$\widetilde{c_b}_{b,p,t}$	Subcontracting cost for a unit of product p by subcontractor b in period t
$\widetilde{c_S}_{s,r,t}$	Purchasing cost of a unit of raw material r at supplier s in period t
$\widetilde{Q_m}_m, \widetilde{Q_b}_b, \widetilde{Q_s}_s$	Linguistic evaluation of quality related, respectively, to manufacturing plant m , to subcontractor b and to supplier s
$\widetilde{Rl_m}_m, \widetilde{Rl_b}_b, \widetilde{Rl_s}_s$	Linguistic evaluation of the reliability, respectively, related to manufacturing plant m , to subcontractor b and to supplier s
$\widetilde{F_m}_m, \widetilde{F_b}_b, \widetilde{F_s}_s$	Linguistic evaluation of the flexibility related, respectively, to manufacturing plant m , to subcontractor b and to supplier s
$\widetilde{Rsp_m}_m, \widetilde{Rsp_b}_b, \widetilde{Rsp_s}_s$	Linguistic evaluation of the responsiveness related, respectively, to manufacturing plant m , to subcontractor b and to supplier s
$\widetilde{Rsi_m}_m, \widetilde{Rsi_b}_b, \widetilde{Rsi_s}_s$	Linguistic evaluation of the resilience related, respectively, to manufacturing plant m , to subcontractor b and to supplier s
$\widetilde{Rob_m}_m, \widetilde{Rob_b}_b, \widetilde{Rob_s}_s$	Linguistic evaluation of the robustness related, respectively, to manufacturing plant m , to subcontractor b and to supplier s

- Decision variables:

$x_r_{m,p,t}$	Production quantity in regular time for product p at plant m in period t
$x_ov_{m,p,t}$	Production quantity in overtime for product p at plant m in period t
$x_b_{b,p,t}$	Subcontracting quantity for product p at subcontractor b in period t
$x_s_{s,r,t}$	Purchasing quantity for raw material r from supplier s in period t

6.2 Presentation of the proposed approach

The suggested approach consists of six main steps.

- **Step 1: Select the criteria used for order allocation**

In this first step, the decision-maker must choose among Class I and Class II criteria the ones that match with his strategy, or may add other criteria.

- **Step 2: Provide the set of scenarios allowing to satisfy demand requirements**

We note:

$\Gamma_{p,t}$: a set of scenario able to satisfy demand requirements $D_{p,t}$
 i : index of allocation scenario ($i = 1, \dots, \text{card}(\Gamma_{p,t})$) where:

$$\Gamma_{p,t} = \{S_{p,t}^i\} = \{(x_{-r}^j)_{m \in M^p}, (x_{-ov}^j)_{m \in M^p}, (x_{-b}^i)_{b \in B^p}, (x_{-s}^i)_{m \in M^p} \mid (21)-(27)\} \quad (20)$$

$$\sum_{m \in M^p} x_{-r}^j + \sum_{m \in M^p} x_{-ov}^j + \sum_{b \in B^p} x_{-b}^i = D_{p,t} \quad \forall i, p, t \quad (21)$$

$$\sum_{s \in S^r} x_{-s,r}^i = \left(\sum_{m \in M^p} x_{-r}^j + \sum_{m \in M^p} x_{-ov}^j \right) * \alpha_{p,r} \quad \forall r \in R^p, \quad \forall i, t \quad (22)$$

$$x_{-r}^j \leq cap_{-r} \quad \forall i, m, p, t \quad (23)$$

$$x_{-ov}^j \leq cap_{-ov} \quad \forall i, m, p, t \quad (24)$$

$$x_{-b}^i \leq cap_{-b} \quad \forall i, b, p, t \quad (25)$$

$$x_{-s,r}^i \leq cap_{-s,r} \quad \forall i, r, s, t \quad (26)$$

$$x_{-r}^j, x_{-ov}^j, x_{-b}^i, x_{-s,r}^i \geq 0 \quad \forall i, p, r, t, m, b, s \quad (27)$$

Constraint (21) ensures that all customer demands are satisfied at the end of each planning period.

The quantity of each raw material to be supplied in each planning period is calculated using constraint (22). Constraints (23) and (24) represent the manufacturer's production capacity limitation during, respectively, regular and overtime hours.

Constraints (25) and (26) indicate the maximum utilised capacities at each supplier and subcontractor in each period, respectively.

Constraint (27) expresses the non-negativity of different decision variables.

• **Step 3: Evaluate the performance of each allocation scenario**

(a) *Rate each actor with respect to Class I criteria*

The cost is given by a trapezoidal fuzzy number, whereas the quality and the reliability are supposed to be evaluated by the decision-maker using linguistic labels, according to previous experiences with the partner.

(b) *Construct the fuzzy comparison matrix (allocation scenarios-selected criteria of Class I)*

Using the results of step 3(a), the fuzzy comparison matrix can be constructed according to the Class I criteria defined in the first step, using the following proposals:

(i) The cost measure of each allocation scenario is the sum of production costs, supply costs and subcontracting costs. If $\widetilde{TC}_{p,t}^i$ denotes the total cost measure of scenario $S_{p,t}^i$, then:

$$\widetilde{TC}_{p,t}^i = \sum_{m \in M^p} x_{-r}^j \otimes \widetilde{c}_{-r} + \sum_{m \in M^p} x_{-ov}^j \otimes \widetilde{c}_{-ov} + \sum_{b \in B^p} x_{-b}^i \otimes \widetilde{c}_{-b} + \sum_{s \in S^r} \sum_{r \in R^p} x_{-s,r}^i \otimes \widetilde{c}_{-s,r} \quad \forall i, p, t \quad (28)$$

(ii) The measure of each allocation scenario according to the criterion 'number of actors' can be evaluated by calculating the number of manufacturing sites, subcontractors and suppliers involved in this allocation.

If $nb_{p,t}^i$ denotes the number of actors related of scenario $S_{p,t}^i$ then:

$$nb_{p,t}^i = \text{card}(E_{m,p,t}^i) \quad \forall i, p, t \quad (29)$$

where

$$E_{m,p,t}^i = \{m \in M^p \mid x_{-r}^j > 0\} \cup \{m \in M^p \mid x_{-ov}^j > 0\} \cup \{b \in B^p \mid x_{-b}^i > 0\} \cup \{s \in S^r \mid x_{-s,r}^i > 0\} \quad (30)$$

We have now to aggregate the quality and reliability of the suppliers used in each considered scenario. We denote by $\widetilde{Q}_{p,t}^i$, $\widetilde{Rl}_{p,t}^i$, respectively, the quality and reliability measures associated to allocation scenario $S_{p,t}^i$.

The assessment of each allocation according to the quality (resp. reliability) criterion can be estimated using various strategies. We limit our discussion to three classical ones, rather intuitive:

- *Pessimistic strategy*: The quality (resp. reliability) measure associated to an allocation scenario is assumed to be the quality (resp. reliability) of the worst partner:

$$\widetilde{Q}_{p,t}^i = \text{Min}(\text{Min}_{m \in E_{m,p,t}^i} \widetilde{Q}_{-m,p}, \text{Min}_{b \in E_{b,p,t}^i} \widetilde{Q}_{-b,p}, \text{Min}_{s \in E_{s,p,t}^i} \widetilde{Q}_{-s,r}) \quad \forall i \quad (31)$$

$$\widetilde{Rl}_{p,t}^i = \text{Min}(\text{Min}_{m \in E_{m,p,t}^i} \widetilde{Rl}_{-m,p}, \text{Min}_{b \in E_{b,p,t}^i} \widetilde{Rl}_{-b,p}, \text{Min}_{s \in E_{s,p,t}^i} \widetilde{Rl}_{-s,r}) \quad \forall i \quad (32)$$

- *Optimistic strategy*: The quality (resp. reliability) measure associated to an allocation scenario is assumed to be the quality (resp. reliability) of the best partner:

$$\widetilde{Q}_{p,t}^i = \text{Max}(\text{Max}_{m \in E_{m,p,t}^i} \widetilde{Q}_{-m,p}, \text{Max}_{b \in E_{b,p,t}^i} \widetilde{Q}_{-b,p}, \text{Max}_{s \in E_{s,p,t}^i} \widetilde{Q}_{-s,r}) \quad \forall i \quad (33)$$

$$\widetilde{Rl}_{p,t}^i = \text{Max}(\text{Max}_{m \in E_{m,p,t}^i} \widetilde{Rl}_{-m,p}, \text{Max}_{b \in E_{b,p,t}^i} \widetilde{Rl}_{-b,p}, \text{Max}_{s \in E_{s,p,t}^i} \widetilde{Rl}_{-s,r}) \quad \forall i \quad (34)$$

- *Medium strategy*: The quality (resp. reliability) measure associated to an allocation scenario is assumed to be the average of the quality (resp. reliability) measures of the actors involved in this allocation scenario:

$$\widetilde{Q}_{p,t}^i = \left[\left(\sum_{m \in M^p} (x_{-r_{m,p,t}^i} + x_{-ov_{m,p,t}^i}) \otimes \widetilde{Q}_{-m,p} \right) \oplus \sum_{b \in B^p} x_{-b_{b,p,t}^i} \otimes \widetilde{Q}_{-b,p} \oplus \sum_{s \in S^r} \sum_{r \in R^p} x_{-s_{s,r,t}^i} \otimes \widetilde{Q}_{-s,r} \right] / \left[\left(\sum_{m \in M^p} (x_{-r_{m,p,t}^i} + x_{-ov_{m,p,t}^i}) + \sum_{b \in B^p} x_{-b_{b,p,t}^i} + \sum_{s \in S^r} \sum_{r \in R^p} x_{-s_{s,r,t}^i} \right) \right] \quad (35)$$

$$\widetilde{Rl}_{p,t}^i = \left[\left(\sum_{m \in M^p} (x_{-r_{m,p,t}^i} + x_{-ov_{m,p,t}^i}) \otimes \widetilde{Rl}_{m,p} \right) \oplus \sum_{b \in B^p} x_{-b_{b,p,t}^i} \otimes \widetilde{Rl}_{b,p} \oplus \left(\sum_{s \in S^r} \sum_{r \in R^p} x_{-s_{s,r,t}^i} \otimes \widetilde{Rl}_{s,r} \right) \right] / \left[\left(\sum_{m \in M^p} (x_{-r_{m,p,t}^i} + x_{-ov_{m,p,t}^i}) + \sum_{b \in B^p} x_{-b_{b,p,t}^i} + \sum_{s \in S^r} \sum_{r \in R^p} x_{-s_{s,r,t}^i} \right) \right] \quad (36)$$

(c) Use of fuzzy TOPSIS

In this step, we apply the fuzzy TOPSIS method, considering the fuzzy decision matrix described in 3(b) and the Class I criteria defined in the first step. At the end of this step, we can determine for each allocation scenario $S_{p,t}^i$ the closeness coefficient $CC_{-I_{p,t}^i}$.

- **Step 4: Evaluate the risk of each allocation scenario**

(a) Measure the rating of each actor with respect to Class II criteria

We assume that the decision-maker provides in a linguistic form the rating of each actor with respect to the criteria of flexibility, responsiveness, resilience and robustness. Concerning the stability criterion, we assume that we have access to accurate information on the load of the actor during the previous period.

Table 1. Proposed rules of assessment status of $S_{p,t}^i$.

Closeness coefficient $CC_{-I_{p,t}^i}$	Closeness coefficient $CC_{-II_{p,t}^i}$	Assessment status of $S_{p,t}^i$
$CC_{-I_{p,t}^i} \in [0, 0.4)$	$\forall CC_{-II_{p,t}^i}$	Do not recommend
$CC_{-I_{p,t}^i} \in [0.4, 0.75)$		Recommend with high risk
$CC_{-I_{p,t}^i} \in [0.75, 1]$	$CC_{-II_{p,t}^i} \in [0, 0.4)$	Recommend with moderate risk
	$CC_{-II_{p,t}^i} \in [0.4, 0.75)$	Recommend with low risk
$CC_{-I_{p,t}^i} \in [0.75, 1]$	$CC_{-II_{p,t}^i} \in [0, 0.4)$	Approved with high risk
	$CC_{-II_{p,t}^i} \in [0.4, 0.75)$	Approved with moderate risk
	$CC_{-II_{p,t}^i} \in [0.75, 1]$	Approved and preferred

Table 2. Capacity data for the supply chain network.

<i>Production capacity in regular time (expressed in term of number of product p) ($cap_{-r_{m,p,t}}$)</i>	
m1: 10	m2: 5
<i>Production capacity in overtime(expressed in term of number of product p) ($cap_{-ov_{m,p,t}}$)</i>	
m1: 5	m2: 5
<i>Subcontractor capacity(expressed in term of number of product p) ($cap_{-b_{b,p,t}}$)</i>	
b1: 3	b2: 1
<i>Supply capacity (expressed in term of number of raw material r) ($cap_{-s_{s,r,t}}$)</i>	
s1: 20	s2: 5

(b) *Construct the fuzzy comparison matrix (allocation scenarios-Class II criteria)*

The fuzzy decision matrix can be constructed according to the Class II criteria using the result of the previous step 5(a). The rating of each allocation scenario with respect to the criteria of Class II can be calculated according to the decision-maker strategy (i.e. optimistic strategy, pessimistic strategy or medium strategy) as described previously.

(c) *Use of fuzzy TOPSIS*

Fuzzy TOPSIS is then used, taking as an input the fuzzy decision matrix obtained in previous step. The method calculates the closeness coefficient of each allocation scenario according to the selected criteria related to Class II. Obviously, the allocation scenario with the highest closeness coefficient value $CC_{-II_{p,t}^i}$ will be the less risky.

• **Step 5: Interpretation of the results**

The use of fuzzy TOPSIS has for outputs the two closeness coefficients related to Class I (performance) and Class II (risk) criteria. Their interpretation can be facilitated by using rules such as those suggested in Table 1. The performance is here rated according to the {do not recommend, recommend, approve} scale, while the risk is denoted by the {low, moderate, high} linguistic scale. The decision-maker can of course use other linguistic values to rate the allocation scenarios according to his strategy.

7. Numerical example

In this section, a numerical example is presented to show the applicability of the suggested approach. The main purpose of this example is to compare in a considered period t the performance and risk of different allocation scenarios that satisfy the global demand of finished product p $D_{p,t} = 28$.

The case study involves two manufacturing plants ($m = 1, 2$) and two subcontractors ($b = 1, 2$) who produce the finished product p . One unit of raw material r is required to produce one unit of p . Each raw material r can be provided by two suppliers ($s = 1, 2$). Data on the capacities of the considered SC are given in Table 2.

The decision-maker uses the classical linguistic variables presented in Table 3 to assess the importance of the various criteria. The linguistic variables shown in Table 4 (also classical) are used to rate the actors with respect to each criterion (Hatami-Marbini and Tavana 2011).

The computational procedure can be summarised as follows:

Step 1: Select the used criteria for order allocation

The decision-maker chooses for instance the following criteria:

- *Class I: Performance strategy and quality of service*
 - (1) Cost
 - (2) Quality
 - (3) Reliability
 - (4) Number of actors
- *Class II: Risk*
 - (1) Flexibility
 - (2) Responsiveness
 - (3) Resilience
 - (4) Robustness
 - (5) Stability

Step 2: Provide the set of scenario able to satisfy demand requirements

In a preliminary study, the analytical model has been implemented in LINGO in order to get the optimal solution of the problem when a simple objective function linked to cost is used (Khemiri et al. 2015). As a consequence, reusing the LINGO model while removing the objective function allows easily generating all the possible scenarios satisfying the demand (see Table 5); the solver was therefore used for checking the satisfaction of the constraints.

Step 3: Evaluate the performance of each allocation scenario

- *Assess the rating of each actor with respect to Class I criteria*

The ratings of the actors defined by the decision-maker according to the various criteria of Class I are shown in Table 6. The cost ratings are given as trapezoidal fuzzy numbers while the quality and reliability ratings are given through linguistic variables that can be converted into trapezoidal fuzzy numbers using Table 4.

- *Construct the fuzzy comparison matrix*

We assume that the decision-maker uses the medium strategy to assess each allocation scenario on the quality and reliability criteria (formulae (35) and (36)). The cost measures are obtained using formula (28) and the number of actors is given by formula (29). The result is the fuzzy decision matrix of Table 7.

Table 3. Linguistic variables for the importance weight of each criterion (Hatami-Marbini and Tavana 2011).

Very low (VL)	(0; 0; 0.1; 0.2)
Low (L)	(0.1; 0.2; 0.2; 0.3)
Medium low (ML)	(0.2; 0.3; 0.4; 0.5)
Medium (M)	(0.4; 0.5; 0.5; 0.6)
Medium high (MH)	(0.5; 0.6; 0.7; 0.8)
High (H)	(0.7; 0.8; 0.8; 0.9)
Very high (VH)	(0.8; 0.9; 1.0; 1.0)

Table 4. Linguistic variables for ratings (Hatami-Marbini and Tavana 2011).

Very poor (VP)	(0; 0; 1; 2)
Poor (P)	(1; 2; 2; 3)
Medium poor (MP)	(2; 3; 4; 5)
Fair (F)	(4; 5; 5; 6)
Medium good (MG)	(5; 6; 7; 8)
Good (G)	(7; 8; 8; 9)
Very good (VG)	(8; 9; 10; 10)

Table 5. The set of allocation scenarios.

Allocation scenarios	Quantity							
	$x_{r_{m1},p,t}$	$x_{r_{m2},p,t}$	$x_{ov_{m1},p,t}$	$x_{ov_{m2},p,t}$	$x_{b_{b1},p,t}$	$x_{b_{b2},p,t}$	$x_{s_{s1},t}$	$x_{s_{s2},t}$
$S_{p,t}^1$	10	5	5	5	3	0	20	5
$S_{p,t}^2$	9	5	5	5	3	1	19	5
$S_{p,t}^3$	9	5	5	5	3	1	20	4
$S_{p,t}^4$	10	4	5	5	3	1	19	5
$S_{p,t}^5$	10	4	5	5	3	1	20	4
$S_{p,t}^6$	10	5	4	5	3	1	19	5
$S_{p,t}^7$	10	5	4	5	3	1	20	4
$S_{p,t}^8$	10	5	5	4	3	1	19	5
$S_{p,t}^9$	10	5	5	4	3	1	20	4
$S_{p,t}^{10}$	10	5	5	5	2	1	20	5

Table 6. Ratings of the actors by the decision-maker using selected criteria of Class I.

Criteria Class I	Actors					
	m1	m2	b1	b2	s1	s2
Cost	Regular time cost: (9, 10, 11, 12) Overtime cost: (26, 27,28,30)	Regular time cost: (1, 2, 3, 5) Overtime cost: (15, 16, 17, 20)	(45, 50, 50, 53)	(250,260,265,270)	(5,10,12,17)	(10,15,20,25)
Quality	G	VG	MG	P	G	VG
Reliability	G	VG	G	VP	MG	VG

Table 7. Fuzzy comparison matrix (allocation scenarios-Class I criteria).

Allocation scenarios	Criteria			
	Cost	Quality	Reliability	Number of actors
$S_{p,t}^1$	(585, 750, 840, 1019)	(7.169, 8.169,8.509,9.226)	(6.528,7.528, 8.188, 8.905)	(5,5,5,5)
$S_{p,t}^2$	(821, 990, 1082,1260)	(7.057,8.057, 8.403, 9.115)	(6.423,7.403, 8.076, 8.788)	(6,6,6,6)
$S_{p,t}^3$	(816, 985, 1074,1252)	(7.038,8.038, 8.365, 9.096)	(6.365,7.346, 8.019, 8.750)	(6,6,6,6)
$S_{p,t}^4$	(829, 998, 1090,1267)	(7.038,8.038, 8.365, 9.096)	(6.403,7.384, 8.038, 8.769)	(6,6,6,6)
$S_{p,t}^5$	(824, 993, 1082,1259)	(7.019,8.019, 8.326, 9.076)	(6.346,7.326, 7.980, 8.730)	(6,6,6,6)
$S_{p,t}^6$	(804, 973, 1065,1242)	(7.057,8.057, 8.403, 9.115)	(6.423,7.403, 8.076, 8.788)	(6,6,6,6)
$S_{p,t}^7$	(799, 968, 1057,1234)	(7.038,8.038, 8.365, 9.096)	(6.365,7.346, 8.019, 8.750)	(6,6,6,6)
$S_{p,t}^8$	(815, 984, 1076,1252)	(7.038,8.038, 8.365, 9.096)	(6.403,7.384, 8.038, 8.769)	(6,6,6,6)
$S_{p,t}^9$	(810, 979, 1068,1244)	(7.019,8.019, 8.326, 9.076)	(6.346,7.326, 7.980, 8.730)	(6,6,6,6)
$S_{p,t}^{10}$	(790, 960, 1055,1236)	(7.094,8.094, 8.415, 9.132)	(6.396,7.377, 8.056, 8.773)	(6,6,6,6)

• Use of Fuzzy TOPSIS

Fuzzy TOPSIS is used with as input the fuzzy decision matrix shown in Table 7. The importance weights of the Class I criteria determined by the decision-maker are shown in Table 8. Table 7 is used to obtain the normalised Fuzzy decision matrix presented in Table 9 using the formulae (9) and (10). Using the normalised Fuzzy decision matrix and the importance weights of the criteria in Table 8, a weight normalised Fuzzy decision matrix is calculated using formula (12), as shown in Table 10.

Table 8. Importance weights of Class I criteria.

Criteria I			
Cost	Quality	Reliability	Number of actors
VH	M	H	VH

Table 9. Normalised fuzzy decision matrix – Class I.

Allocation scenarios	Criteria I			
	Cost	Quality	Reliability	Number of actors
$S_{p,t}^1$	(0.574, 0.696, 0.780,1)	(0.777, 0.885, 0.922, 1)	(0.733, 0.845, 0.919, 1)	(1, 1, 1, 1)
$S_{p,t}^2$	(0.464,0.540, 0.590,0.712)	(0.764,0.873, 0.910,0.987)	(0.721,0.831, 0.906, 0.986)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^3$	(0.467,0.544, 0.593,0.716)	(0.762,0.871, 0.906,0.985)	(0.714,0.824, 0.900, 0.982)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^4$	(0.461,0.536, 0.586,0.705)	(0.762,0.871, 0.906,0.985)	(0.719,0.829, 0.902, 0.984)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^5$	(0.464,0.540, 0.589,0.709)	(0.760,0.869, 0.902,0.983)	(0.712,0.822, 0.896, 0.980)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^6$	(0.471,0.549, 0.601, 0.727)	(0.764,0.873, 0.910,0.987)	(0.721,0.831, 0.906, 0.986)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^7$	(0.474,0.553, 0.604, 0.732)	(0.762,0.871, 0.906,0.985)	(0.714,0.824, 0.900, 0.982)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^8$	(0.467,0.543, 0.594, 0.717)	(0.762,0.871, 0.906,0.985)	(0.719,0.829, 0.902, 0.984)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^9$	(0.470,0.547, 0.597, 0.722)	(0.760,0.869, 0.902,0.983)	(0.712,0.822, 0.896, 0.980)	(0.833, 0.833, 0.833, 0.833)
$S_{p,t}^{10}$	(0.473,0.554, 0.609, 0.740)	(0.768,0.877, 0.912,0.989)	(0.718,0.828, 0.904, 0.985)	(0.833, 0.833, 0.833, 0.833)

The fuzzy positive ideal solution (A^+) and the FNIS (A^-) (which are crisp numbers) are calculated using formulae (13) and (14) as follows:

$$A^+ = [(1, 1, 1, 1), (0.6, 0.6, 0.6, 0.6), (0.9, 0.9, 0.9, 0.9), (1, 1, 1, 1)]$$

$$A^- = [(0.369, 0.369, 0.369, 0.369), (0.304, 0.304, 0.304, 0.304), (0.498, 0.498, 0.498, 0.498), (0.666, 0.666, 0.666, 0.666)]$$

The distance of each allocation scenario $S_{p,t}^i$ to A^+ and A^- with respect to the various criteria is calculated using formula (5), as shown, respectively, in Tables 11 and 12.

The calculated d_i^+ and d_i^- of the various allocation scenarios $S_{p,t}^i$ can, respectively, be obtained using formulae (17) and (18) as shown in Table 13. The closeness coefficient of the allocation scenarios is then calculated using formula (19).

Step 4: Evaluate the risk of each allocation scenario

- Measure the rating of each partner with respect to Class II criteria

The ratings of the actors defined by the decision-maker according to the criteria of Class II are shown in Table 14. The flexibility, responsiveness, resilience and robustness ratings are given using linguistic variables. For the criterion of stability, the decision-maker knows the previous load of each actor; the instability measurement is determined by calculating the difference between the previous and the actual load.

- Construct the fuzzy comparison matrix (allocation scenarios - risk criteria)

We assume that the decision-maker uses the ‘average’ strategy to calculate the measure of each allocation scenario according to the risk criteria. The result is given in Table 15.

Table 10. Weighted normalised fuzzy decision matrix – Class I

Allocation Scenarios	Criteria			
	Cost	Quality	Reliability	Number of actors
$S_{p,t}^1$	(0.459, 0.626, 0.780, 1)	(0.310, 0.442, 0.461, 0.6)	(0.513, 0.676, 0.735, 0.9)	(0.8, 0.9, 1, 1)
$S_{p,t}^2$	(0.371, 0.486, 0.590, 0.712)	(0.305, 0.436, 0.455, 0.592)	(0.504, 0.665, 0.725, 0.888)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^3$	(0.373, 0.490, 0.593, 0.716)	(0.305, 0.435, 0.453, 0.591)	(0.500, 0.659, 0.720, 0.884)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^4$	(0.369, 0.483, 0.586, 0.705)	(0.305, 0.435, 0.453, 0.591)	(0.503, 0.663, 0.722, 0.886)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^5$	(0.371, 0.486, 0.589, 0.709)	(0.304, 0.434, 0.451, 0.590)	(0.498, 0.658, 0.716, 0.882)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^6$	(0.376, 0.494, 0.601, 0.727)	(0.305, 0.436, 0.455, 0.592)	(0.504, 0.665, 0.725, 0.888)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^7$	(0.379, 0.498, 0.604, 0.732)	(0.305, 0.435, 0.453, 0.591)	(0.500, 0.659, 0.720, 0.884)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^8$	(0.373, 0.489, 0.594, 0.717)	(0.305, 0.435, 0.453, 0.591)	(0.503, 0.663, 0.722, 0.886)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^9$	(0.376, 0.492, 0.597, 0.722)	(0.304, 0.434, 0.451, 0.590)	(0.498, 0.658, 0.716, 0.882)	(0.666, 0.750, 0.833, 0.833)
$S_{p,t}^{10}$	(0.378, 0.499, 0.609, 0.740)	(0.307, 0.438, 0.456, 0.593)	(0.502, 0.662, 0.723, 0.886)	(0.666, 0.750, 0.833, 0.833)

Table 11. Distance between each allocation scenario and A^+ .

Allocation scenarios	Criteria			
	Cost	Quality	Reliability	Number of actors
$S_{p,t}^1$	0.3464	0.1786	0.2380	0.1118
$S_{p,t}^2$	0.4766	0.1830	0.2459	0.2393
$S_{p,t}^3$	0.4735	0.1840	0.2499	0.2393
$S_{p,t}^4$	0.4803	0.1840	0.2475	0.2393
$S_{p,t}^5$	0.4772	0.1850	0.2516	0.2393
$S_{p,t}^6$	0.4683	0.1830	0.2459	0.2393
$S_{p,t}^7$	0.4651	0.1840	0.2499	0.2393
$S_{p,t}^8$	0.4735	0.1840	0.2475	0.2393
$S_{p,t}^9$	0.4704	0.1850	0.2516	0.2393
$S_{p,t}^{10}$	0.4628	0.1818	0.2476	0.2393

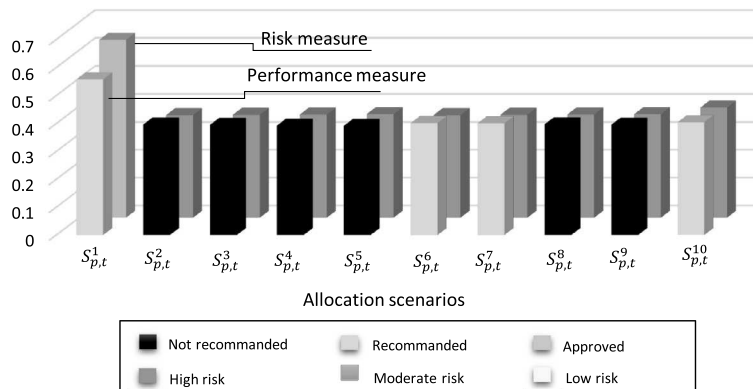


Figure 3. The performance and risk of the allocation scenarios.

Table 12. Distance between each allocation scenario and A^- .

Allocation scenarios	Criteria			
	Cost	Quality	Reliability	Number of actors
$S_{p,t}^1$	0.4001	0.1811	0.2493	0.2713
$S_{p,t}^2$	0.2124	0.1757	0.2401	0.1250
$S_{p,t}^3$	0.2155	0.1746	0.2364	0.1250
$S_{p,t}^4$	0.2079	0.1746	0.2382	0.1250
$S_{p,t}^5$	0.2109	0.1734	0.2345	0.1250
$S_{p,t}^6$	0.2223	0.1757	0.2401	0.1250
$S_{p,t}^7$	0.2255	0.1746	0.2364	0.1250
$S_{p,t}^8$	0.2159	0.1746	0.2382	0.1250
$S_{p,t}^9$	0.2190	0.1734	0.2345	0.1250
$S_{p,t}^{10}$	0.2303	0.1767	0.2386	0.1250

Table 13. Computation of $d_{p,t}^{+i}$, $d_{p,t}^{-ij}$ and $CC_{p,t}^i$.

Allocation scenarios	$d_{p,t}^{+i}$	$d_{p,t}^{-i}$	$CC_{p,t}^i$
$S_{p,t}^1$	0.8749	1.1019	0.5574
$S_{p,t}^2$	1.1449	0.7533	0.3968
$S_{p,t}^3$	1.1469	0.7515	0.3958
$S_{p,t}^4$	1.1513	0.7458	0.3931
$S_{p,t}^5$	1.1533	0.7439	0.3921
$S_{p,t}^6$	1.1366	0.7632	0.4017
$S_{p,t}^7$	1.1385	0.7615	0.4008
$S_{p,t}^8$	1.1445	0.7537	0.3970
$S_{p,t}^9$	1.1465	0.7520	0.3961
$S_{p,t}^{10}$	1.1317	0.7707	0.4051

Table 14. Ratings of the actors by the decision-maker under Class II criteria.

Criteria Class B	Actors					
	m1	m2	b1	b2	s1	s2
Flexibility	VG	MG	VG	VP	MG	G
Responsiveness	VG	G	VG	VP	VG	G
Resilience	VG	G	VG	VP	VG	VG
Robustness	G	VG	VG	VP	VG	MG
Stability (Previous load)	$x_{r_{m1,p,t-1}} = 11$ $x_{OV_{m1,p,t-1}} = 5$	$x_{r_{m2,p,t-1}} = 5$ $x_{OV_{m2,p,t-1}} = 5$	3	0	20	5

- Use of fuzzy TOPSIS
- The decision-maker provides the weights of the risk criteria shown in Table 16. This table and the fuzzy decision matrix presented in Table 15 are used for calculating the closeness coefficient for each allocation scenario as shown in Table 17.

Step 5: Interpretation of the results

The rules presented in Table 1 have been used to classify the allocation scenarios in Figure 3. As seen in Figure 3, the first scenario $S_{p,t}^1$ denotes better performance and risk measures than the other solutions, and is ‘recommended’ with

Table 15. Fuzzy comparison matrix (allocation scenarios-Class II criteria).

Allocation scenarios	Risk criteria				
	Flexibility	Responsiveness	Resilience	Robustness	Stability
$S_{p,t}^1$	(6.207,7.207,8.113,8.773)	(7.716,8.716,9.433,9.716)	(7.811,8.811,9.622,9.811)	(7.433,8.433,9.150,9.528)	(0.125,0.125,0.125,0.125)
$S_{p,t}^2$	(6.076,7.057,7.961,8.634)	(7.557,8.538,9.250,9.557)	(7.653,8.634,9.442,9.653)	(7.288,8.269,9.000,9.384)	(0.5,0.5,0.5,0.5)
$S_{p,t}^3$	(6.038,7.019,7.942,8.615)	(7.576,8.557,9.288,9.576)	(7.653,8.634,9.442,9.653)	(7.346,8.326,9.057,9.423)	(0.5,0.5,0.5,0.5)
$S_{p,t}^4$	(6.134,7.115,8.019,8.673)	(7.576,8.557,9.288,9.576)	(7.673,8.653,9.480,9.673)	(7.269,8.250,8.961,9.365)	(0.5,0.5,0.5,0.5)
$S_{p,t}^5$	(6.096,7.076,8.000,8.653)	(7.596,8.576,9.326,9.596)	(7.673,8.653,9.480,9.673)	(7.326,8.307,9.019,9.403)	(0.5,0.5,0.5,0.5)
$S_{p,t}^6$	(6.076,7.057,7.961,8.634)	(7.557,8.538,9.250,9.557)	(7.653,8.634,9.442,9.653)	(7.288,8.269,9.000,9.384)	(0.5,0.5,0.5,0.5)
$S_{p,t}^7$	(6.038,7.019,7.942,8.615)	(7.576,8.557,9.288,9.576)	(7.653,8.634,9.442,9.653)	(7.346,8.326,9.057,9.423)	(0.5,0.5,0.5,0.5)
$S_{p,t}^8$	(6.134,7.115,8.019,8.673)	(7.576,8.557,9.288,9.576)	(7.673,8.653,9.480,9.673)	(7.269,8.250,8.961,9.365)	(0.5,0.5,0.5,0.5)
$S_{p,t}^9$	(6.096,7.076,8.000,8.653)	(7.596,8.576,9.326,9.596)	(7.673,8.653,9.480,9.673)	(7.326,8.307,9.019,9.403)	(0.5,0.5,0.5,0.5)
$S_{p,t}^{10}$	(6.056,7.037,7.943,8.622)	(7.566,8.547,9.264,9.566)	(7.660,8.641,9.452,9.660)	(7.283,8.264,8.981,9.377)	(0.375,0.375,0.375,0.375)

Table 16. Importance weights of Class II criteria.

Criteria B				
Flexibility	Responsiveness	Resilience	Robustness	Stability
VH	H	H	VH	VH

Table 17. Computation of $CC_{p,t}^i$.

Allocation scenarios	$CC_{p,t}^i$
$S_{p,t}^1$	0.6367
$S_{p,t}^2$	0.3679
$S_{p,t}^3$	0.3692
$S_{p,t}^4$	0.3700
$S_{p,t}^5$	0.3713
$S_{p,t}^6$	0.3679
$S_{p,t}^7$	0.3692
$S_{p,t}^8$	0.3700
$S_{p,t}^9$	0.3713
$S_{p,t}^{10}$	0.3950

Table 18. Experiments for sensibility analysis.

Expt. no.	Definition								
	Importance weights of Class I criteria				Importance weights of Class II criteria				
	Cost	Quality	Reliability	Number of actors	Flexibility	Responsiveness	Resilience	Robustness	Stability
1	VL	VL	VL	VL	VL	VL	VL	VL	VL
2	M	M	M	M	M	M	M	M	M
3	VH	VH	VH	VH	VH	VH	VH	VH	VH
4	VH	VL	VL	VL	VL	VL	VL	VL	VL
5	VL	VH	VL	VL	VL	VL	VL	VL	VL
6	VL	VL	VH	VL	VL	VL	VL	VL	VL
7	VL	VL	VL	VH	VL	VL	VL	VL	VL
8	VL	VL	VL	VL	VH	VL	VL	VL	VL
9	VL	VL	VL	VL	VL	VH	VL	VL	VL
10	VL	VL	VL	VL	VL	VL	VH	VL	VL
11	VL	VL	VL	VL	VL	VL	VL	VH	VL
12	VL	VL	VL	VL	VL	VL	VL	VL	VH
13	VH	VH	VH	VH	VL	VL	VL	VL	VL
14	VL	VL	VL	VL	VH	VH	VH	VH	VH
15	VL	L	ML	M	MH	H	VH	VH	VL
16	VH	H	MH	M	ML	L	VL	VL	VH
17	H	ML	M	MH	L	VL	VH	H	ML
18	ML	MH	VH	VL	L	M	H	H	M

Table 19. Results of sensibility analysis: performance measure.

Expt.no.	$CC_{p,t}^i$										Ranking
	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	
1	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
2	0.5203	0.4051	0.4039	0.4020	0.4008	0.4085	0.4073	0.4048	0.4036	0.4112	R1>R10>R6>R7>R2>R8>R3>R9>R4>R5
3	0.5729	0.4240	0.4224	0.4200	0.4183	0.4284	0.4269	0.4236	0.4220	0.4318	R1>R10>R6>R7>R2>R8>R3>R9>R4>R5
4	0.4781	0.3590	0.3607	0.3558	0.3575	0.3654	0.3672	0.3610	0.3627	0.3702	R1>R10>R7>R6>R9>R8>R3>R2>R5>R4
5	0.4699	0.4369	0.4352	0.4347	0.4330	0.4378	0.4361	0.4354	0.4338	0.4400	R1>R10>R6>R2>R7>R8>R3>R4>R9>R5
6	0.4714	0.4393	0.4359	0.4371	0.4337	0.4401	0.4368	0.4378	0.4344	0.4395	R1>R6>R10>R2>R8>R4>R7>R3>R9>R5
7	0.5129	0.3736	0.3734	0.3728	0.3726	0.3747	0.3745	0.3736	0.3734	0.3756	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
8	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
9	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
10	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
11	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
12	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
13	0.5729	0.4240	0.4224	0.4200	0.4183	0.4284	0.4269	0.4236	0.4220	0.4318	R1>R10>R6>R7>R2>R8>R3>R9>R4>R5
14	0.4199	0.3856	0.3854	0.3847	0.3844	0.3867	0.3865	0.3856	0.3854	0.3877	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
15	0.4999	0.4208	0.4194	0.4194	0.4180	0.4217	0.4203	0.4201	0.4187	0.4223	R1>R10>R6>R2>R7>R8>R3>R4>R9>R5
16	0.5304	0.4058	0.4049	0.4021	0.4011	0.4105	0.4097	0.4059	0.4050	0.4142	R1>R10>R6>R7>R8>R2>R9>R3>R4>R5
17	0.5215	0.3925	0.3922	0.3896	0.3892	0.3968	0.3966	0.3930	0.3928	0.3999	R1>R10>R6>R7>R8>R9>R2>R3>R4>R5
18	0.4984	0.4459	0.4433	0.4430	0.4403	0.4481	0.4455	0.4447	0.4421	0.4495	R1>R10>R6>R2>R7>R8>R3>R4>R9>R5

Table 20. Results of sensibility analysis: risk measure.

Expt. no.	$CC_{p,t}^i$										Ranking
	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	
1	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
2	0.5847	0.3726	0.3737	0.3743	0.3754	0.3726	0.3737	0.3743	0.3754	0.3930	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
3	0.6565	0.3860	0.3873	0.3882	0.3895	0.3860	0.3873	0.3882	0.3895	0.4123	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
4	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
5	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
6	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
7	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
8	0.4795	0.3984	0.3974	0.4013	0.4002	0.3984	0.3974	0.4013	0.4002	0.4024	R1>R10>R8>R4>R9>R5>R6>R2>R7>R3
9	0.4700	0.4145	0.4159	0.4160	0.4174	0.4145	0.4159	0.4160	0.4174	0.4202	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
10	0.4709	0.4157	0.4159	0.4172	0.4174	0.4157	0.4159	0.4172	0.4174	0.4212	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
11	0.4694	0.4151	0.4179	0.4143	0.4171	0.4151	0.4179	0.4143	0.4171	0.4198	R1>R10>R7>R3>R9>R5>R6>R2>R8>R4
12	0.6215	0.2528	0.2531	0.2532	0.2534	0.2528	0.2531	0.2532	0.2534	0.2936	R1<R10<R9<R5<R8<R4<R7<R3<R6<R2
13	0.4245	0.3664	0.3667	0.3668	0.3671	0.3664	0.3667	0.3668	0.3671	0.3726	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
14	0.6565	0.3860	0.3873	0.3882	0.3895	0.3860	0.3873	0.3882	0.3895	0.4123	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
15	0.5320	0.4691	0.4710	0.4712	0.4731	0.4691	0.4710	0.4712	0.4731	0.4723	R1>R9>R5>R10>R8>R4>R7>R3>R6>R2
16	0.6287	0.2872	0.2872	0.2882	0.2882	0.2872	0.2872	0.2882	0.2882	0.3238	R1>R10>R9>R5>R8>R4>R7>R3>R6>R2
17	0.5461	0.3975	0.3992	0.3982	0.3999	0.3975	0.3992	0.3982	0.3999	0.4125	R1>R10>R9>R5>R7>R3>R8>R4>R6>R2
18	0.5838	0.3826	0.3847	0.3836	0.3857	0.3826	0.3847	0.3836	0.3857	0.4028	R1>R10>R9>R5>R7>R3>R8>R4>R6>R2

‘moderate risk’. The main reason is that this scenario implies fewer actors (5 actors instead of 6 in the other scenarios); moreover, subcontractor b2, who has a poor performance (high cost, poor quality and reliability) and a very low resistance to the risk factors (very poor flexibility, responsiveness, etc.) is not involved.

The scenarios $S_{p,t}^6$, $S_{p,t}^7$ and $S_{p,t}^{10}$ are recommended with high risk whereas all the other scenarios are not recommended according to the rules suggested in Table 1.

In our opinion, the results presented in Figure 3 may allow a decision-maker to determine a balanced solution between expected performance and risk.

8. Sensitivity analysis

The use of overlapping fuzzy weights is known as giving some intrinsic robustness to the aggregation method. As an illustration, a sensitivity analysis was conducted. The details of 18 experiments are summarised in Table 18. For example, in the first three experiments, the weights of all decision criteria are assumed to be equal to ‘VL’, ‘M’ and ‘VH’. In experiments 4–12, the importance weight of each decision criteria is assumed to be ‘Very High (VH)’ and the rest of the criteria are set to ‘Very Low (VL)’. In experiment 13 (resp. 14), the weights of all performance-based decision criteria (resp. risk-based decision criteria) are set to the highest value (VH), while weights of all risk-based decision criteria (resp. performance-based decision criteria) are set as lowest value (VL). The remaining experiments were randomly generated.

The results of the sensitivity analysis are illustrated in Tables 19 and 20. It can be seen that, although the rank of some allocation scenarios changes with respect to different fuzzy weight bases, $S_{p,t}^1$ is still selected as the best allocation scenario, since it has the highest performance and risk measures. We can also notice that out of 18 experiments, $S_{p,t}^{10}$ has the second rank in 17 experiments according to both performance and risk measures. Additionally, the allocation scenario $S_{p,t}^5$ has the lowest performance score in all the experiments and $S_{p,t}^2$ has the lowest risk score in 16 experiments.

Therefore, we can conclude that the proposed decision-making approach is relatively robust to small changes in the fuzzy criteria weights on this example.

9. Conclusion and future research work

Nowadays, most SC networks are affected by various sources of uncertainty, including an increased variability of the demand. Consequently, making explicit the risk linked to the future execution of a supply plan may be an asset for supporting the decision of the logistic managers. However, the academic literature still shows a lack of approaches considering risk-based factors when constructing a procurement–production tactical plan. The existing studies are indeed mainly based on the optimisation of performance factors, and often focus on price or profit criteria.

This article proposes to use a multi-criteria decision-making approach to deal with an integrated procurement–production system in a multi-echelon SC network involving multiple suppliers, multiple production sites, multiple subcontractors and several customers, in which some critical data are evaluated in an imprecise way using fuzzy logic. The decision-maker selects first risk-based and performance-based decision criteria that match his strategy and his industrial context. The set of possible plans is generated as well as their performance and risk measures, in order to better support the selection of a procurement–production plan.

The main interest of the proposal is in our opinion to keep a clear distinction between assessment criteria linked to performance and to risk, since there is clearly no ‘mechanical’ compensation between these types of criteria in real situations

Another interest of the method is that it better preserves the decision maker’s preferences than existing optimisation approaches. Additionally, it provides appropriate flexibility to the decision-maker for selecting the preferred tactical plan among several alternatives. The developed approach is generic in nature and can be easily extended to other selection problems.

The suggested approach has of course limitations. Some of them are classical, like the possible interaction between the dispersion of the assessments and the weights of the criteria. Others are linked to the chosen strategy, i.e. the generation of all the possible scenarios, which makes difficult to address very large/multi-period problems. Extensions of this work are in progress for defining heuristics in order to only generate a given number of ‘good’ scenarios. Other limitations are linked to the hypothesis considered for simplifying the problem: it would for instance be more realistic to incorporate several distribution centres in order to deal with an integrated procurement, production and distribution planning problem. The method should also be extended to take into account the various lead times associated with purchasing and manufacturing. Additionally, we assumed for simplicity that the customer demand is deterministic: it would be interesting to consider it as uncertain. Addressing these limitations will be the next step of this study.

Disclosure statement

No potential conflict of interest was reported by the authors.

References

- Arabzad, S. M., M. Ghorbani, J. Razmi, and H. Shirouyehzad. 2015. "Employing Fuzzy TOPSIS and SWOT for Supplier Selection and Order Allocation Problem." *The International Journal of Advanced Manufacturing Technology* 76 (5–8): 803–818.
- Baumann, P., and N. Trautmann. 2013. "A Continuous-time MILP Model for Short-term Scheduling of Make-and-pack Production Processes." *International Journal of Production Research* 51 (6): 1707–1727.
- Bellman, R. E., and L. A. Zadeh. 1970. "Decision-making in a Fuzzy Environment." *Management Science* 17 (4): B-141.
- Bhamra, R., S. Dani, and K. Burnard. 2011. "Resilience: The Concept, a Literature Review and Future Directions." *International Journal of Production Research* 49 (18): 5375–5393.
- Brans, J., and P. Vincke. 1985. "A Preference Ranking Organisation Method: The PROMETHEE Method for MCDM." *Management Science* 31 (6): 647–656.
- Buckley, J. J. 1985. "Fuzzy Hierarchical Analysis." *Fuzzy Sets and Systems* 17 (3): 233–247.
- Chauhan, S. S., R. Nagi, and J. M. Proth. 2004. "Strategic Capacity Planning in Supply Chain Design for a New Market Opportunity." *International Journal of Production Research* 42 (11): 2197–2206.
- Chen, C. T. 2000. "Extensions of the TOPSIS for Group Decision-making under Fuzzy Environment." *Fuzzy Sets and Systems* 114 (1): 1–9.
- Chen, S. P., and P. C. Chang. 2006. "A Mathematical Programming Approach to Supply Chain Models with Fuzzy Parameters." *Engineering Optimization* 38 (6): 647–669.
- Chen, S. P., and W. L. Huang. 2010. "A Membership Function Approach for Aggregate Production Planning Problems in Fuzzy Environments." *International Journal of Production Research* 48 (23): 7003–7023.
- Chen, C. T., C. T. Lin, and S. F. Huang. 2006. "A Fuzzy Approach for Supplier Evaluation and Selection in Supply Chain Management." *International Journal of Production Economics* 102 (2): 289–301.
- Chhaochhria, P., and S. C. Graves. 2013. "A Forecast-driven Tactical Planning Model for a Serial Manufacturing System." *International Journal of Production Research* 51 (23–24): 6860–6879.
- Chou, S. Y., Y. H. Chang, and C. Y. Shen. 2008. "A Fuzzy Simple Additive Weighting System under Group Decision-making for Facility Location Selection with Objective/Subjective Attributes." *European Journal of Operational Research* 189 (1): 132–145.
- Curcurù, G., G. M. Galante, and C. M. La Fata. 2013. "An Imprecise Fault Tree Analysis for the Estimation of the Rate Of Occurrence of Failure (ROCOF)." *Journal of Loss Prevention in the Process Industries* 26 (6): 1285–1292.
- Cyrulnik, B., and D. Macey. 2009. *Resilience: How Your Inner Strength Can Set You Free from the past*. London: Penguin Books.
- Dickson, G. W. 1966. "An Analysis of Supplier Selection Systems and Decision." *Journal of Purchasing and Materials Management* 2: 5–17.
- Ellram, L. 1990. "The Supplier Selection Decision in Strategic Partnerships." *Journal of Purchasing and Material Management* 26 (1): 8–14.
- Genin, P., S. Lamouri, and A. Thomas. 2008. "Multi-facilities Tactical Planning Robustness with Experimental Design." *Production Planning and Control* 19 (2): 171–182.
- Gholamian, N., I. Mahdavi, and R. Tavakkoli-Moghaddam. 2016. "Multi-objective Multi-product Multi-site Aggregate Production Planning in a Supply Chain under Uncertainty: Fuzzy Multi-objective Optimisation." *International Journal of Computer Integrated Manufacturing* 29 (2): 149–165.
- Gholamian, N., I. Mahdavi, R. Tavakkoli-Moghaddam, and N. Mahdavi-Amiri. 2015. "Comprehensive Fuzzy Multi-objective Multi-product Multi-site Aggregate Production Planning Decisions in a Supply Chain under Uncertainty." *Applied Soft Computing* 37: 585–607.
- Gigović, L., D. Pamučar, Z. Bajić, and M. Milićević. 2016. "The Combination of Expert Judgment and GIS-MAIRCA Analysis for the Selection of Sites for Ammunition Depot." *Sustainability* 8, 372.
- Gigović, L., D. Pamučar, D. Božanić, and S. Ljubojević. 2017. "Application of the GIS-DANP-MABAC Multi-criteria Model for Selecting the Location of Wind Farms: A Case Study of Vojvodina, Serbia." *Renewable Energy* 103: 501–521.
- Giri, B. C., S. Bardhan, and T. Maiti. 2016. "Coordinating a Three-layer Supply Chain with Uncertain Demand and Random Yield." *International Journal of Production Research* 54 (8): 2499–2518.
- Goffin, K., M. Szejczewski, and C. New. 1997. "Managing Suppliers: When Fewer Can Mean More." *International Journal of Physical Distribution & Logistics Management* 27 (7): 422–436.
- Goyal, S. K., and S. G. Deshmukh. 1992. "Integrated Procurement–Production Systems: A Review." *European Journal of Operational Research* 62 (1): 1–10.
- Guner, A. F., A. Yucel, and G. Ayyildiz. 2009. "An Integrated Fuzzy-lp Approach for a Supplier Selection Problem in Supply Chain Management." *Expert Systems with Applications* 36 (5): 9223–9228.

- Gupta, A., and C. D. Maranas. 1999. "A Hierarchical Lagrangean Relaxation Procedure for Solving Midterm Planning Problems." *Industrial & Engineering Chemistry Research* 38 (5): 1937–1947.
- Gupta, A., and C. D. Maranas. 2003. "Managing Demand Uncertainty in Supply Chain Planning." *Computers and Chemical Engineering* 27 (8–9): 1219–1227.
- Haldar, A., A. Ray, D. Banerjee, and S. Ghosh. 2012. "A Hybrid MCDM Model for Resilient Supplier Selection." *International Journal of Management Science and Engineering Management* 7 (4): 284–292.
- Haldar, A., A. Ray, D. Banerjee, and S. Ghosh. 2014. "Resilient Supplier Selection under a Fuzzy Environment." *International Journal of Management Science and Engineering Management* 9 (2): 147–156.
- Hatami-Marbini, A., and M. Tavana. 2011. "An Extension of the Electre I Method for Group Decision-making under a Fuzzy Environment." *Omega*. 39: 373–386.
- Huang, S. H., and H. Keskar. 2007. "Comprehensive and Configurable Metrics for Supplier Selection." *International Journal of Production Economics* 105 (2): 510–523.
- Hwang, C. L., and K. Yoon. 1981. *Multiple Attribute Decision Making. Methods and Application*. Berlin Heidelberg: Springer Verlag.
- Ivanov, D., A. Dolgui, B. Sokolov, F. Werner, and M. Ivanova. 2016. "A Dynamic Model and an Algorithm for Short-term Supply Chain Scheduling in the Smart Factory Industry 4.0." *International Journal of Production Research* 54 (2): 386–402.
- Kanyalkar, A. P., and G. K. Adil. 2010. "A Robust Optimisation Model for Aggregate and Detailed Planning of a Multi-site Procurement-production-distribution System." *International Journal of Production Research* 48 (3): 635–656.
- Kazemi Zanjani, M., M. Noureifath, and D. Ait-Kadi. 2010. "A Multi-stage Stochastic Programming Approach for Production Planning with Uncertainty in the Quality of Raw Materials and Demand." *International Journal of Production Research* 48 (16): 4701–4723.
- Kemmoe, S., P. A. Pernot, and N. Tchernev. 2014. "Model for Flexibility Evaluation in Manufacturing Network Strategic Planning." *International Journal of Production Research* 52 (15): 4396–4411.
- Khakdaman, M., K. Y. Wong, B. Zohoori, M. K. Tiwari, and R. Merkert. 2015. "Tactical Production Planning in a Hybrid Make-to-stock–make-to-order Environment under Supply, Process and Demand Uncertainties: A Robust Optimisation Model." *International Journal of Production Research* 53 (5): 1358–1386.
- Khemiri, R., K. ElBedoui-Maktouf, B. Grabot, and B. Zouari. 2015. "Proposition d'une nouvelle approche de planification intégrée dans le cadre d'une entreprise multi-sites [Proposal of a New Approach for Integrated Planning in a Multi-Site Company]." In *11ème Congrès International de Génie Industriel - CIGI 2015*, Québec, Canada, October 26–28.
- Kim, G., C. S. Park, and K. P. Yoon. 1997. "Identifying Investment Opportunities for Advanced Manufacturing Systems with Comparative-integrated Performance Measurement." *International Journal of Production Economics* 50 (1): 23–33.
- Liang, T. F. 2008. "Integrating Production–Transportation Planning Decision with Fuzzy Multiple Goals in Supply Chains." *International Journal of Production Research* 46 (6): 1477–1494.
- Mafakheri, F., M. Breton, and A. Ghoniem. 2011. "Supplier Selection-order Allocation: A Two-stage Multiple Criteria Dynamic Programming Approach." *International Journal of Production Economics* 132 (1): 52–57.
- Mensah, P., and Y. Merkurjev. 2014. "Developing a Resilient Supply Chain." *Procedia-Social and Behavioral Sciences* 110: 309–319.
- Ming, Y., B. Grabot, and R. Houé. 2014. "A Typology of the Situations of Cooperation in Supply Chains." *Computers and Industrial Engineering* 67: 56–71.
- Mirzapour Al-e-hashem, S. M. J., H. Malekly, and M. B. Aryanezhad. 2011. "A Multi-objective Robust Optimization Model for Multi-product Multi-site Aggregate Production Planning in a Supply Chain under Uncertainty." *International Journal of Production Economics* 134 (1): 28–42.
- Monczka, R. M., R. J. Trent, and T. J. Callahan. 1993. "Supply Base Strategies to Maximize Supplier Performance." *International Journal of Physical Distribution & Logistics Management* 23 (4): 42–54.
- Niknamfar, A. H., S. T. A. Niaki, and S. H. R. Pasandideh. 2015. "Robust Optimization Approach for an Aggregate Production – Distribution Planning in a Three-level Supply Chain." *The International Journal of Advanced Manufacturing Technology* 76 (1–4): 623–634.
- Opricovic, S. 1998. "Multicriteria Optimization of Civil Engineering Systems." *Faculty of Civil Engineering, Belgrade* 2 (1): 5–21.
- Pamučar, D., and G. Čirović. 2015. "The Selection of Transport and Handling Resources in Logistics Centers Using Multi-attributive Border Approximation Area Comparison (MABAC)." *Expert Systems with Applications* 42 (6): 3016–3028.
- Pamučar, D., L. Vasin, and V. Lukovac. 2014. "Selection of Railway Level Crossings for Investing in Security Equipment using Hybrid Dematel-Maric Model." In *XVI International Scientific-expert Conference on Railways- RAILCON 14*, Nis, Serbia, October 9–10.
- Peidro, D., J. Mula, R. Poler, and J. L. Verdegay. 2009. "Fuzzy Optimization for Supply Chain Planning under Supply, Demand and Process Uncertainties." *Fuzzy Sets and Systems* 160 (18): 2640–2657.
- Pi, W. N., and C. Low. 2005. "Supplier Evaluation and Selection Using Taguchi Loss Functions." *The International Journal of Advanced Manufacturing Technology* 26 (1–2): 155–160.
- Roy, B. 1978. "Electre III: Un Algorithme De Classement Fondé Sur Une Représentation floue Des Préférences En Présence De Critères Multiples." [A Ranking Algorithm Based on a Fuzzy Representation of Preferences in Presence of Multiple Criteria.] *Cahiers Du Centre D'Etudes De Recherche Opérationnelle* 20 (1): 3–24.

- Roy, B., and P. Bertier. 1971. "La méthode ELECTRE II : une méthode de classement en présence de critères multiples [A Ranking Method in Presence of Multiple Criteria]." Note de travail 142. Paris: Direction Scientifique, Sema (Metra International).
- Saaty, T. L. 1980. *The Analytic Hierarchy Process*. New York: McGraw-Hill.
- Sahu, A. K., S. Datta, and S. S. Mahapatra. 2016. "Evaluation and Selection of Resilient Suppliers in Fuzzy Environment." *Benchmarking: An International Journal* 23 (3): 651–673.
- Selim, H., C. Araz, and I. Ozkarahan. 2008. "Collaborative Production–Distribution Planning in Supply Chain: A Fuzzy Goal Programming Approach." *Transportation Research Part E: Logistics and Transportation Review* 44 (3): 396–419.
- Shih, H. S., H. J. Shyur, and E. S. Lee. 2007. "An Extension of TOPSIS for Group Decision Making." *Mathematical and Computer Modelling* 45 (7–8): 801–813.
- Shiple, D. D. 1985. "Resellers' Supplier Selection Criteria for Different Consumer Products." *European Journal of Marketing* 19 (7): 26–36.
- Su, T. S., and Y. F. Lin. 2015. "Fuzzy Multi-objective Procurement/Production Planning Decision Problems for Recoverable Manufacturing Systems." *Journal of Manufacturing Systems* 37: 396–408.
- Torabi, S. A., and E. Hassini. 2008. "An Interactive Possibilistic Programming Approach for Multiple Objective Supply Chain Master Planning." *Fuzzy Sets and Systems* 159 (2): 193–214.
- Torabi, S. A., and E. Hassini. 2009. "Multi-site Production Planning Integrating Procurement and Distribution Plans in Multi-Echelon Supply Chains: An Interactive Fuzzy Goal Programming Approach." *International Journal of Production Research* 47 (19): 5475–5499.
- Torabi, S. A., and M. Moghaddam. 2011. "Multi-site Integrated Production-distribution Planning with Transshipment: A Fuzzy Goal Programming Approach." *International Journal of Production Research* 50 (6): 1726–1748.
- Triantaphyllou, E., and C. T. Lin. 1996. "Development and Evaluation of Five Fuzzy Multiattribute Decision-making Methods." *International Journal of Approximate Reasoning* 14 (4): 281–310.
- Tukamuhabwa, B. R., M. Stevenson, J. Busby, and M. Zorzini. 2015. "Supply Chain Resilience: Definition, Review and Theoretical Foundations for Further Study." *International Journal of Production Research* 53 (18): 5592–5623.
- Wang, R. C., and T. F. Liang. 2005. "Applying Possibilistic Linear Programming to Aggregate Production Planning." *International Journal of Production Economics* 98 (3): 328–341.
- Wang, S., M. Liu, and C. Chu. 2015. "A Branch-and-bound Algorithm for Two-stage No-wait Hybrid Flow-shop Scheduling." *International Journal of Production Research* 53 (4): 1143–1167.
- Weber, C., John R. Current, and W. C. Benton. 1991. "Vendor Selection Criteria and Methods." *European Journal of Operational Research* 50 (1): 2–18.
- Zadeh, L. A. 1965. "Fuzzy Sets." *Information and Control* 8 (3): 338–353.
- Zavadskas, E. K., A. Kaklauskas, and V. Sarka. 1994. "The New Method of Multicriteria Complex Proportional Assessment of Projects." *Technological and Economic Development of Economy* 1 (3): 131–139.
- Zimmermann, H. J. 2011. *Fuzzy Set Theory and Its Applications*. Boston, Dordrecht: Springer Science and Business Media.
- Zouggari, A., and L. Benyoucef. 2012. "Simulation Based Fuzzy TOPSIS Approach for Group Multi-criteria Supplier Selection Problem." *Engineering Applications of Artificial Intelligence* 25 (3): 507–519.